


Z-Carb-HTA концевые фрезы

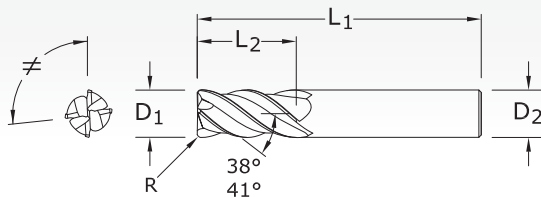

ZH1MCR

ТЕХНИЧЕСКАЯ
ИНФОРМАЦИЯ 47

ЖАРОПРОЧНЫЕ СПЛАВЫ
ТИТАН

ДИАМЕТР РЕЖ. ЧАСТИ D ₁	ДЛИНА РЕЖ. ЧАСТИ L ₂	мм		УГЛОВОЙ РАДИУС R	EDP NO.	
		ОБЩАЯ ДЛИНА L ₁	ДИАМЕТР ХВОСТОВИКА D ₂		Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
6,0	13,0	57,0	6,0	0,5	46450	—
6,0	13,0	57,0	6,0	1,0	46451	—
6,0	13,0	57,0	6,0	1,5	46452	—
8,0	19,0	63,0	8,0	0,5	46453	—
8,0	19,0	63,0	8,0	1,0	46454	—
8,0	19,0	63,0	8,0	1,5	46455	—
10,0	22,0	72,0	10,0	0,5	46456	—
10,0	22,0	72,0	10,0	1,0	46457	—
10,0	22,0	72,0	10,0	1,5	46458	—
10,0	22,0	72,0	10,0	2,0	46459	—
12,0	26,0	83,0	12,0	0,5	46460	46471
12,0	26,0	83,0	12,0	1,0	46461	46472
12,0	26,0	83,0	12,0	1,5	46462	46473
12,0	26,0	83,0	12,0	2,0	46463	46474
12,0	26,0	83,0	12,0	3,0	46464	46475
16,0	32,0	92,0	16,0	1,5	46465	46476
16,0	32,0	92,0	16,0	2,0	46466	46477
16,0	32,0	92,0	16,0	3,0	46467	46478
20,0	38,0	104,0	20,0	3,0	46468	46479
20,0	38,0	104,0	20,0	4,0	46469	46480
20,0	38,0	104,0	20,0	5,0	46470	46481

ДОПУСКИ (мм)

ДИАМЕТР 6 мм

D₁ = +0,000/-0,030

D₂ = h₆

R = +0,000/-0,050

ДИАМЕТР >6-10 мм

D₁ = +0,000/-0,040

D₂ = h₆

R = +0,000/-0,050

ДИАМЕТР >10-20 мм

D₁ = +0,000/-0,050

D₂ = h₆

R = +0,000/-0,050

